



Multi-circuit metering
& measurement

DIRIS Digiware U

Voltage acquisition module



DIRIS Digiware U-10/U-20/U-30



Configuration
with Easy Config System.

Function

The **DIRIS Digiware U** module measures voltage for the entire system. This pools together all voltage measurements.

The Digiware RJ45 Bus allows you to pass voltage measurements as well as power supply and communication to all connected products.

Advantages

- 1 single voltage measurement point for the entire system.
- Single point of protection for voltage measuring.
- A complete, dedicated solution:
 - metering,
 - monitoring voltage,
 - quality analysis of the supplied voltage.
- No hazardous voltage on cabinet doors.
- Adapted to all types of network: single-phase, three-phase.

The solution for

- Industry
- Building
- Infrastructure
- Data center



Strong points

- 1 single voltage measurement point for the entire system
- Plug & Play
- Compact



RJ45 (Digiware Bus) cables are available.

Conformity to standards

- IEC 61557-12



- ISO 14025



- UL



Create your project


- Find the best DIRIS Digiware configuration:
www.meter-selector.com



Application	Voltage measurement module		
	Metering	Monitoring	Analysis
DIRIS Digiware U	U-10	U-20	U-30
Multi-measurement			
U12, U23, U31, V1, V2, V3, f	•	•	•
U system, V system			•
Ph/N unbalance			•
Ph/Ph unbalance			•
Quality analysis			
THDv1, THDv2, THDv3, THDu12, THDu23, THDu31		•	•
Individual harmonics U & V (up to 63rd)			•
Voltage dips, swells and interruptions (EN 50160)			•
Alarms			
On threshold			•
History of average values			
45 days (max)			•
Format			
Width/number of modules	18 mm / 1	18 mm / 1	18 mm / 1

Dimensions (mm)

DIRIS Digiware U

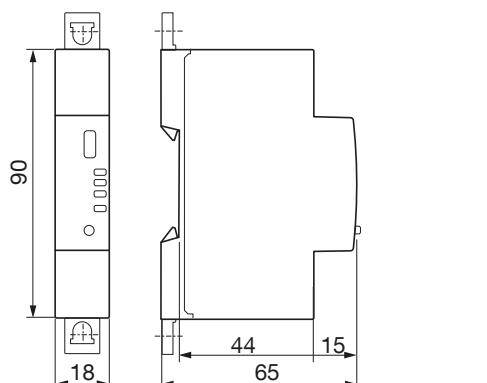

Specifications

Measuring characteristics

Voltage measurement - DIRIS Digiware U

Characteristics of the network measured	50-300 VAC (Ph/N) - 87-520 VAC (Ph/Ph) - CAT III
Frequency range	45 ... 65 Hz
Frequency accuracy	Class 0.02
Network type	Single-phase/ Two-phase / Two-phase with neutral / Three-phase / Three-phase with neutral
Measurement by voltage transformer	Primary: 400 000 VAC Secondary: 60, 100, 110, 173, 190 VAC
Input consumption	≤ 0.1 VA
Permanent overload	300 VAC Ph/N
Accuracy of voltage measurement	Class 0.2
Connection	Removable screw terminal block, 4 positions, stranded or solid 0.2 ... 2.5 mm ² cable

Communication specifications

USB

Protocol	Modbus RTU on USB
Function	Configuration of DIRIS Digiware U and I modules
Location	On each DIRIS Digiware U and I measurement module
Connection	Type B micro USB connector

References

Digiware connection cables	Reference
RJ45 cables for Digiware Bus	Length 0.06 m
	4829 0189
	Length 0.10 m
	4829 0181
	Length 0.20 m
	4829 0188
	Length 0.50 m
	4829 0182
	Length 1 m
	4829 0183
Replacement reference: Digiware bus terminating resistor (supplied with C and D devices)	Length 2 m
	4829 0184
	Length 3 m
	4829 0190
	Length 5 m
	4829 0186
	Length 10 m
	4829 0187
	Reel 50 m + 100 connectors
	4829 0185
USB configuration cable	4829 0050

DIRIS Digiware	Reference
U-10	Metering
U-20	Monitoring
U-30	Analysis

Accessories	Description of accessories	To be ordered in multiples of	Reference
Fuse holder to protect voltage inputs (type RM) 3 pole	4	5701 0018	
gG 10x38 0.5 A fuses	10	6012 0000	